


1


In the box there are the following items:

- Sata to SAS cable
- FAN
- Backplane
- Plastic taps
- Management cable (not used)

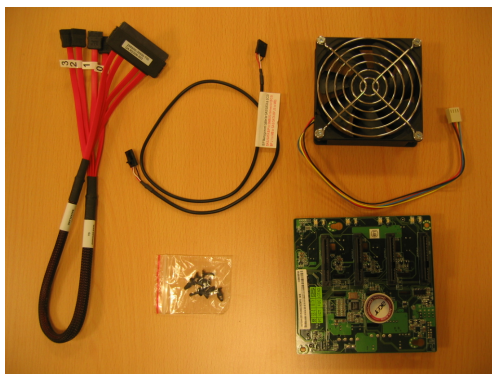


2

Take the FAN and the four plastic taps. Plug them into the holes around the FAN like it is shown in pictures:




3

Position the fan on the cage and connect the cable to the motherboard, on the system fan connector.

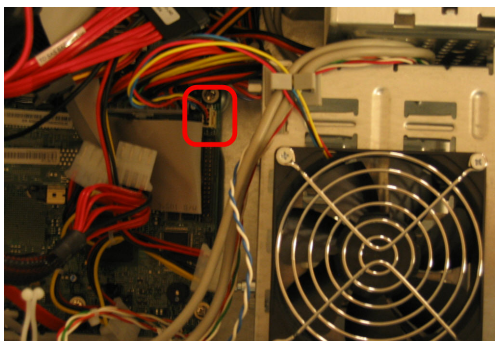


4

Push each plastic tap from the internal part of the cage to fix the FAN to the metal cage

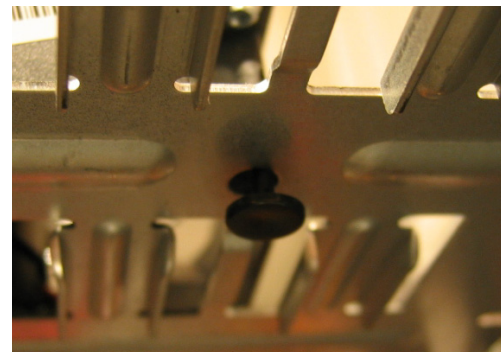


5

Place the backplane on the rear part of the cage and plug it, using the big holes.

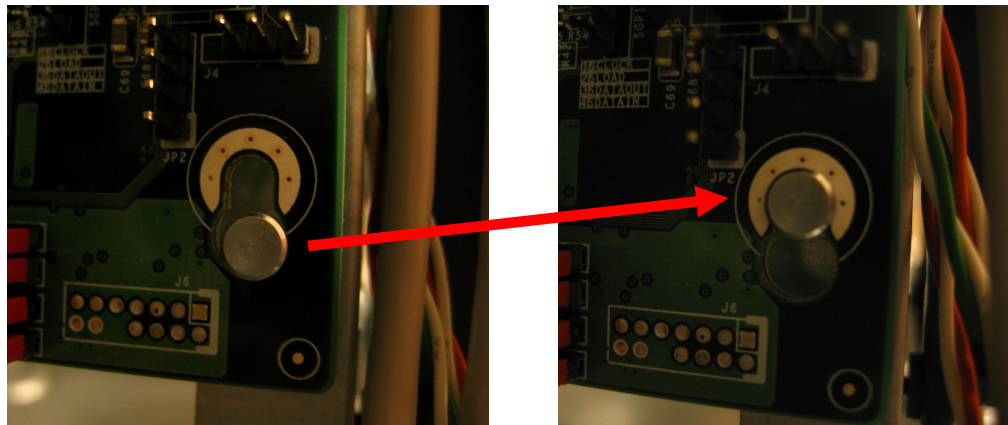


6

Screw the backplane to the metal cage

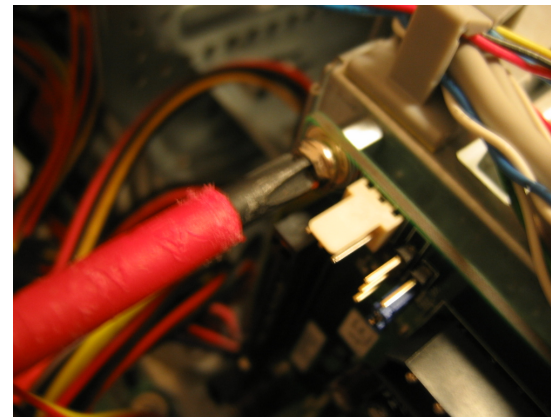

7

Connect the power cables.

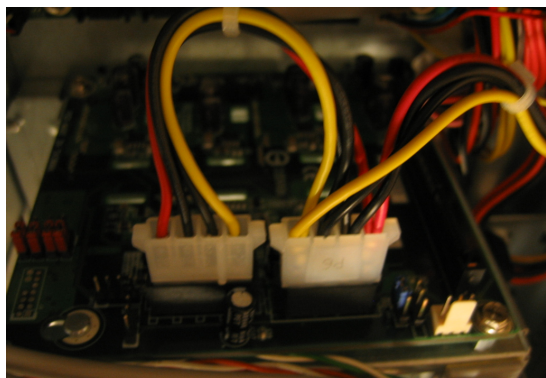

8

The backplane is ready to be used. Just connect the red data cable from the backplane to the motherboard sata connectors.

HD bay 1 (P0)

HD bay 2 (P1)

HD bay 3 (P2)

HD bay 4 (P3)

